- **Project Name:** MnDOT 260138; SP# 8208-45, Cottage Grove
- **Project Number:** Contract ID: 260138 / State Proj# 8208-45 (TH95) SAP 082-622-018
- **Bid Date/Time:** November 18, 2026 @ 9:30am~ ***Please send quotes by 11/18/26 @ 8:00am***
- **Bid Docs:** https://meyerci.sharefile.com/public/share/web-s1cfdae369d294b2982a7bc74b427dcf9

Work Scopes Needed:

Field Office / Restroom Rental	Clearing & Grubbing	Sawcutting	Geotextile
Geomembrane	Calcium Chloride	Aggregates	Pavement Marking / Striping
Concrete Flatwork / Curb	Mailbox	Traffic Control	Erosion Control/ Seeding
Asphalt - Paving/Milling	DI/PVC	RCP	Castings / Truncated Domes

Submit Quotes To: **estimating@meyerci.com**

Work consists of:
MnDOT is seeking a contractor for 0.643 miles of road work on TH 95 at County Road 22 in Cottage Grove, Washington County. The project includes grading, bituminous surfacing, a roundabout, ADA improvements and lighting. The contract is scheduled for the November 18, 2026 letting and has a 6.70% DBE goal.

DBE Goal for this Project is: 6.7%
DBE Directory. A directory of all certified DBEs in the state of Minnesota is available at the following link: https://mnucp.dbesystem.com/

The Minnesota Unified Certification Program (MnUCP) maintains this directory. It is the definitive source of information regarding the DBE certification status of firms in Minnesota. Pursuant to 49 C.F.R. § 26.111, to qualify for credit toward the DBE goal, a DBE firm must be certified.

Employment Goals: 20% Female and 32% Minority /
Prevailing Wage applies: Yes


Starting Date: March 1, 2027
Completion Date: June 1, 2028

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

Project Location:

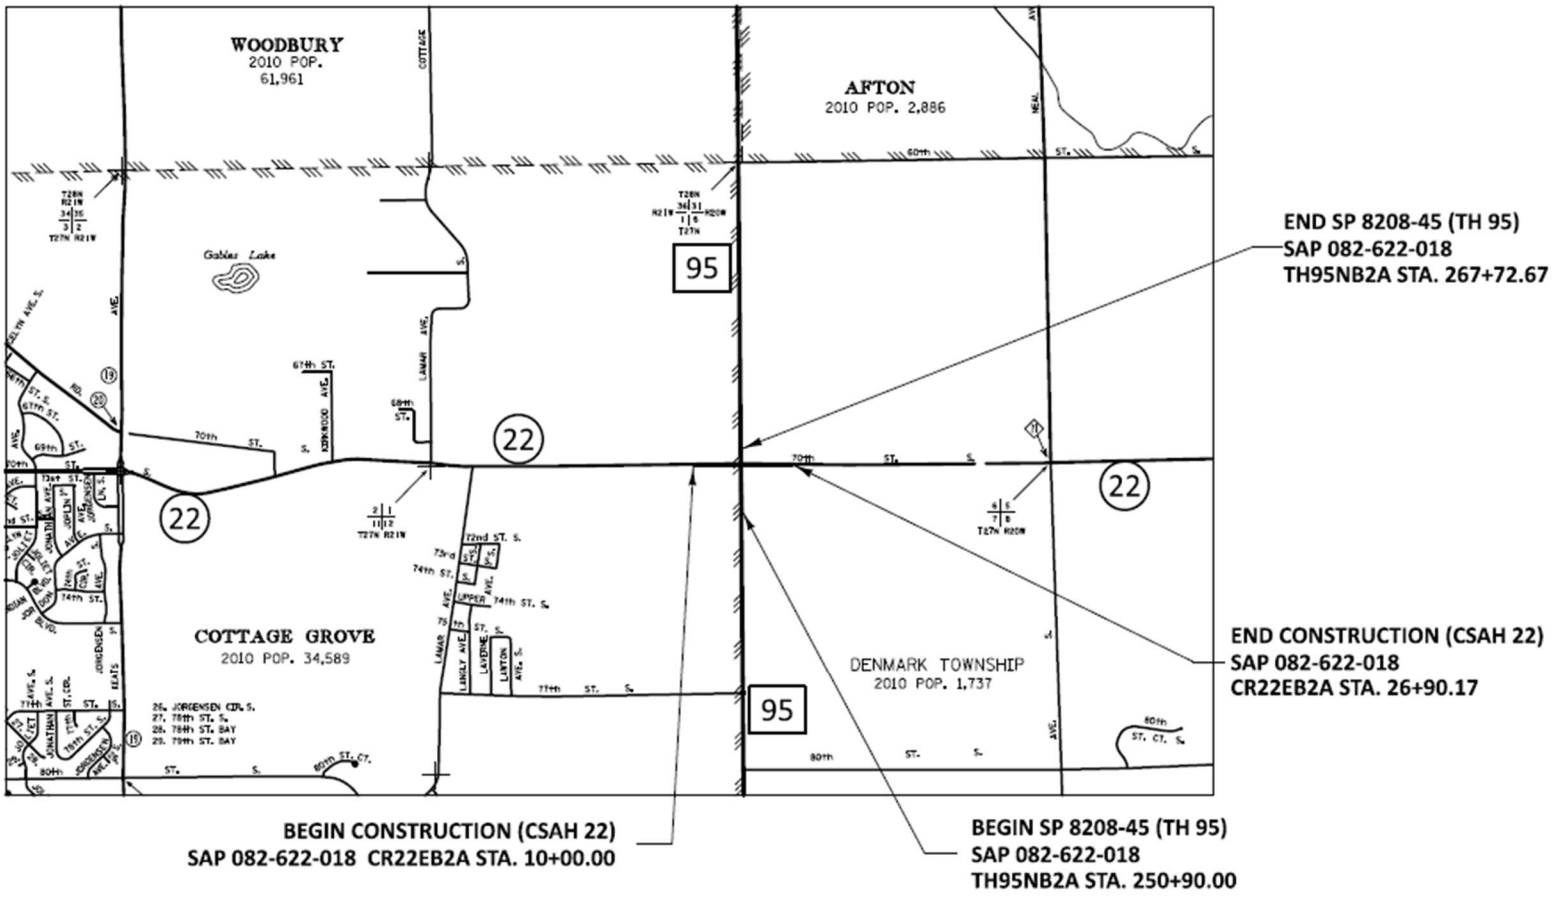

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

Unit Pricing

Line	Item	Quantity	Unit	Description
0005	2011601/01000	1	LS	AS BUILT
0010	2021501/00010	1	LS	MOBILIZATION
0015	2031502/00010	1	EACH	FIELD OFFICE
0020	2031502/00110	1	EACH	FIELD LABORATORY
0025	2051501/00010	1	LS	MAINT & RESTORATION OF HAUL ROADS
0030	2061601/00050	1	LS	MATERIAL DELIVERY MANAGEMENT SYSTEM
0035	2062602/00010	5	EACH	ENVIRONMENTAL PRODUCT DECLARATION
0040	2101502/00020	57	EACH	CLEARING
0045	2101502/00030	57	EACH	GRUBBING
0050	2101505/00020	0.6	ACRE	CLEARING
0055	2101505/00030	0.6	ACRE	GRUBBING
0060	2104502/01185	1	EACH	REMOVE DELINEATOR / MARKER
0065	2104502/01220	32	EACH	REMOVE SIGN
0070	2104502/03300	5	EACH	SALVAGE SIGN
0075	2104502/03405	2	EACH	SALVAGE SIGN PANEL
0080	2104503/00205	182	LF	SAWING BIT PAVEMENT (FULL DEPTH)
0085	2104503/00265	269	LF	REMOVE METAL CULVERT
0090	2104504/00120	10961	SY	REMOVE BITUMINOUS PAVEMENT
0095	2104504/00140	4366	SY	REMOVE BITUMINOUS SHOULDER PAVEMENT
0100	2104602/00300	1	EACH	REMOVE SIGN SPECIAL
0105	2106507/00010	24106	CY	EXCAVATION - COMMON
0110	2106507/00080	8482	CY	SELECT GRANULAR EMBANKMENT (CV)
0115	2106507/00130	9572	CY	COMMON EMBANKMENT (CV)
0120	2108504/00040	29598	SY	GEOTEXTILE FABRIC TYPE 10
0125	2108604/00020	3111	SY	GEOMEMBRANE SYSTEM
0130	2118507/00111	183	CY	AGGREGATE SURFACING (CV) CLASS 1 MOD
0135	2118509/00030	1900	TON	AGGREGATE SURFACING CLASS 2
0140	2123510/00020	2	HOUR	MOTOR GRADER
0145	2131506/00010	2400	GAL	CALCIUM CHLORIDE SOLUTION
0150	2211507/00170	4486	CY	AGGREGATE BASE (CV) CLASS 5
0155	2232603/00235	958	LF	MILLED SINUSOIDAL RUMBLE STRIPS-CL
0160	2331603/00070	7705	LF	JOINT ADHESIVE
0165	2360509/24205	2927	TON	TYPE SP 12.5 NON WEAR COURSE MIX (4,B)
0170	2360509/24600	3643	TON	TYPE SP 12.5 WEARING COURSE MIX (4,F)
0175	2411507/04060	259	CY	GRANULAR BACKFILL MOD (CV)
0180	2451607/00440	262	CY	MEDIUM FILTER AGGREGATE (CV)
0185	2501502/02036	1	EACH	36" CAS PIPE APRON
0190	2501502/05015	1	EACH	15" RC PIPE APRON
0195	2501502/05018	1	EACH	18" RC PIPE APRON
0200	2501502/05024	2	EACH	24" RC PIPE APRON
0205	2501502/05036	1	EACH	36" RC PIPE APRON
0210	2501502/40015	4	EACH	15" CAS SAFETY APRON
0215	2501502/40018	2	EACH	18" CAS SAFETY APRON

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

0220	2501502/44036	1	EACH	36" RC SAFETY APRON
0225	2501503/00015	72	LF	15" CAS PIPE CULVERT
0230	2501503/00018	42	LF	18" CAS PIPE CULVERT
0235	2501503/00036	14	LF	36" CAS PIPE CULVERT
0240	2502503/01080	143	LF	8" TP PIPE DRAIN
0245	2502503/08080	180	LF	8" PERF TP PIPE DRAIN
0250	2502602/00280	3	EACH	8" TP PIPE DRAIN CLEAN OUT
0255	2503503/19152	251	LF	15" RC PIPE SEWER DES 3006
0260	2503503/19153	544	LF	15" RC PIPE SEWER DES 3006 CL III
0265	2503503/19182	24	LF	18" RC PIPE SEWER DES 3006
0270	2503503/19183	57	LF	18" RC PIPE SEWER DES 3006 CL III
0275	2503503/19243	419	LF	24" RC PIPE SEWER DES 3006 CL III
0280	2503503/19362	121	LF	36" RC PIPE SEWER DES 3006
0285	2503503/19363	171	LF	36" RC PIPE SEWER DES 3006 CL III
0290	2506502/00300	3	EACH	CONST DRAINAGE STRUCTURE DESIGN SPECIAL
0295	2506502/06000	27	EACH	CASTING ASSEMBLY
0300	2506503/00190	48.2	LF	CONST DRAINAGE STRUCTURE DESIGN SD-48
0305	2506503/00193	12.3	LF	CONST DRAINAGE STRUCTURE DESIGN SD-60
0310	2506503/00196	4.4	LF	CONST DRAINAGE STRUCTURE DESIGN SD-72
0315	2506503/02420	37.9	LF	CONST DRAINAGE STRUCTURE DES 48-4020
0320	2506503/03020	13.5	LF	CONST DRAINAGE STRUCTURE DES 60-4020
0325	2506503/03620	17.2	LF	CONST DRAINAGE STRUCTURE DES 72-4020
0330	2506503/04220	6.3	LF	CONST DRAINAGE STRUCTURE DES 84-4020
0335	2511504/00014	102	SY	GEOTEXTILE FILTER TYPE 4
0340	2511507/00014	32	CY	RANDOM RIPRAP CLASS III
0345	2521518/00060	12057	SF	6" CONCRETE WALK
0350	2521518/00070	2639	SF	7" CONCRETE WALK
0355	2521602/00030	279	EACH	DRILL & GROUT REINF BAR (EPOXY COATED)
0360	2521618/00400	2085	SF	CONCRETE CURB RAMP WALK
0365	2531503/02120	220	LF	CONCRETE CURB & GUTTER DESIGN B424
0370	2531503/18424	302	LF	CONCRETE CURB & GUTTER DESIGN R424
0375	2531503/19210	1654	LF	CONCRETE CURB & GUTTER DESIGN S512
0380	2531503/19220	1367	LF	CONCRETE CURB & GUTTER DESIGN S524
0385	2531618/00010	473	SF	TRUNCATED DOMES
0390	2540602/00150	1	EACH	MAIL BOX SUPPORT
0395	2545501/00100	1	LS	LIGHTING SYSTEM
0400	2554502/00002	12	EACH	GUIDE POST TYPE B
0405	2557602/00200	3	EACH	PORTABLE SNOW FENCE PANEL
0410	2557603/12504	876	LF	4' STRUCTURAL SNOW FENCE 25% POROSITY
0415	2563601/00010	1	LS	TRAFFIC CONTROL
0420	2564502/00110	2	EACH	INSTALL SIGN PANEL
0425	2564502/01515	5	EACH	INSTALL SIGN
0430	2564502/02350	8	EACH	DELINEATOR / MARKER PANEL
0435	2564518/00010	873	SF	SIGN

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

0440	2573501/00025	1	LS	STABILIZED CONSTRUCTION EXIT
0445	2573502/00110	22	EACH	STORM DRAIN INLET PROTECTION
0450	2573502/00140	6	EACH	CULVERT END CONTROLS
0455	2573503/00064	3227	L F	SEDIMENT CONTROL LOG TYPE COMPOST
0460	2574505/00010	3.3	ACRE	SUBSOILING
0465	2574505/00020	7.7	ACRE	SOIL BED PREPARATION
0470	2574508/00011	63	LB	FERTILIZER TYPE 1
0475	2574508/00013	990	LB	FERTILIZER TYPE 3
0480	2574508/00014	56	LB	FERTILIZER TYPE 4
0485	2575504/00315	870	S Y	ROLLED EROSION PREVENTION CATEGORY 15
0490	2575504/00320	23525	S Y	ROLLED EROSION PREVENTION CATEGORY 20
0495	2575504/00325	2688	S Y	ROLLED EROSION PREVENTION CATEGORY 25
0500	2575505/00021	5.6	ACRE	SEEDING
0505	2575505/00035	1.7	ACRE	MOWING
0510	2575505/00040	3.8	ACRE	WEED SPRAYING
0515	2575506/00010	0.8	GAL	WEED SPRAY MIXTURE
0520	2575508/40002	376	LB	HYDRAULIC BONDED FIBER MATRIX
0525	2575608/25070	29	LB	SEED SOUTHERN BOULEVARD
0530	2575608/25090	47	LB	SEED SNOW FENCE GROUND COVER
0535	2575608/25100	95	LB	SEED MESIC INSLOPE
0540	2575608/25130	9	LB	SEED WET DITCH
0545	2575608/25180	77	LB	SEED SOUTHERN TALLGRASS ROADSIDE
0550	2577607/00020	335	C Y	GRANULAR CHANNEL LINER
0555	2582503/00010	13560	L F	MOBILE RETROREFLECTOMETER MEASUREMENTS
0560	2582503/40104	2525	L F	4" SOLID LINE MULTI COMP GR IN (WR)
0565	2582503/40106	8320	L F	6" SOLID LINE MULTI COMP GR IN (WR)
0570	2582503/40204	390	L F	4" BROKEN LINE MULTI COMP GR IN (WR)
0575	2582503/40404	2325	L F	4" DBLE SOLID LINE MULTI COMP GR IN (WR)
0580	2582503/79312	51	L F	12" DOTTED LINE PREF THERMO GR IN ESR
0585	2582518/04020	120	S F	PAVT MSSG PREF THERMO GR IN
0590	2582518/08060	384	S F	CROSSWALK PREF THERMO GR IN ESR

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com