- **Project Name:** Minneapolis, South Folwell Safe Routes to School (SRTS)
- **Project Number:** Event# 4339 / SP#141-591-016 / Mpls Proj. #600D10090
- **Bid Date/Time:** November 12, 2026 @ 2pm~ ***Please send quotes by 11/12/26 @ 12:00pm***
- **Bid Docs:** https://meyerci.sharefile.com/public/share/web-sa0b9fe1a77e447f4b971fd71b9b607cc

Work Scopes Needed:

Clear & Grub	Sawcutting	Aggregates	Asphalt Paving
DI/PVC	Casting	Traffic Control	Electrical
Erosion Control	Pavement Marking	Saw & Seal	Precast / Manholes

Submit Quotes To: **estimating@meyerci.com**

Work consists of:
This Safe Routes to School project will improve 21st Ave S between 28th Street and 43rd Street. The project area includes South High School, Folwell Community School, and several parks. We want to make the street safer for everyone. To do that, we are going to think about different ways to slow down traffic on the street.

- **Small and Underutilized Business Program (SUBP) Goals:**
  DBE Goal - 9.8% **DBE Directory**. A directory of all certified DBEs in the state of Minnesota is available at the following link: https://mnucp.dbesystem.com/ The Minnesota Unified Certification Program (MnUCP) maintains this directory. It is the definitive source of information regarding the DBE certification status of firms in Minnesota. Pursuant to 49 C.F.R. § 26.111, to qualify for credit toward the DBE goal, a DBE firm must be certified.

- **Employment Goals:** 20% Female and 32% Minority / **Prevailing Wage applies:** Yes

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

Project Location:

MINNESOTA DEPARTMENT OF TRANSPORTATION
CITY OF MINNEAPOLIS
DEPARTMENT OF PUBLIC WORKS


PROJECT NAME: SOUTH FOLWELL SAFE ROUTES TO SCHOOL
PROJECT NUMBERS: S.P. 141-591-016, L.P. 600D 10090

LOCATION: 21ST AVE S FROM E 43RD ST TO E 28TH ST
CONSTRUCTION PLAN FOR: GRADING, BITUMINOUS, SURFACING, AND ADA IMPROVEMENTS

GROSS LENGTH	9784.48	FT.	1.85 MILES
BRIDGE LENGTH	N/A	FT.	N/A MILES
EXCEPTION LENGTH	7431.40	FT.	1.41 MILES
NET LENGTH	2353.08	FT.	0.45 MILES
PRESENT ADT	1,700		
FUTURE ADT	1,700		
FUTURE HCADT	100		

THE SUBSURFACE UTILITY INFORMATION IN THIS PLAN IS UTILITY QUALITY LEVEL D. THIS UTILITY QUALITY LEVEL WAS DETERMINED ACCORDING TO THE GUIDELINES OF CI/ASCE 38-22, ENTITLED, "STANDARD GUIDELINE FOR INVESTIGATING AND DOCUMENTING UTILITIES."

FUNCTIONAL CLASSIFICATION	LOCAL (E 43RD ST TO E 32ND ST) MINOR COLLECTOR (E 32ND ST TO E 38TH ST)
DESIGN SPEED	25 MPH
DESIGN LOADING	10 TON
NO. OF TRAFFIC LANES	2
NO. OF PARKING LANES	2
STOPPING SIGHT DISTANCE BASED ON	3.5' HEIGHT OF EYE 2' HEIGHT OF OBJECT
DESIGN SPEED NOT ACHIEVED AT	STA 55+57.63 TO STA 55+80.63 ALIGN E_21STAVES STA 62+51.50 TO STA 62+62.21 ALIGN E_21STAVES STA 81+31.81 TO STA 81+81.31 ALIGN E_21STAVES STA 107+45.71 TO STA 107+80.21 ALIGN E_21STAVES
BIKE TRAIL DESIGN SPEED	20 MPH
STOPPING SIGHT DISTANCE BASED ON	4.5' HEIGHT OF EYE 0' HEIGHT OF OBJECT
CLEAR ZONE NOT ACHIEVED AT	STA 95+18.93 TO STA 97+59.53 ALIGN E_21STAVES STA 98+34.32 TO STA 101+13.32 ALIGN E_21STAVES

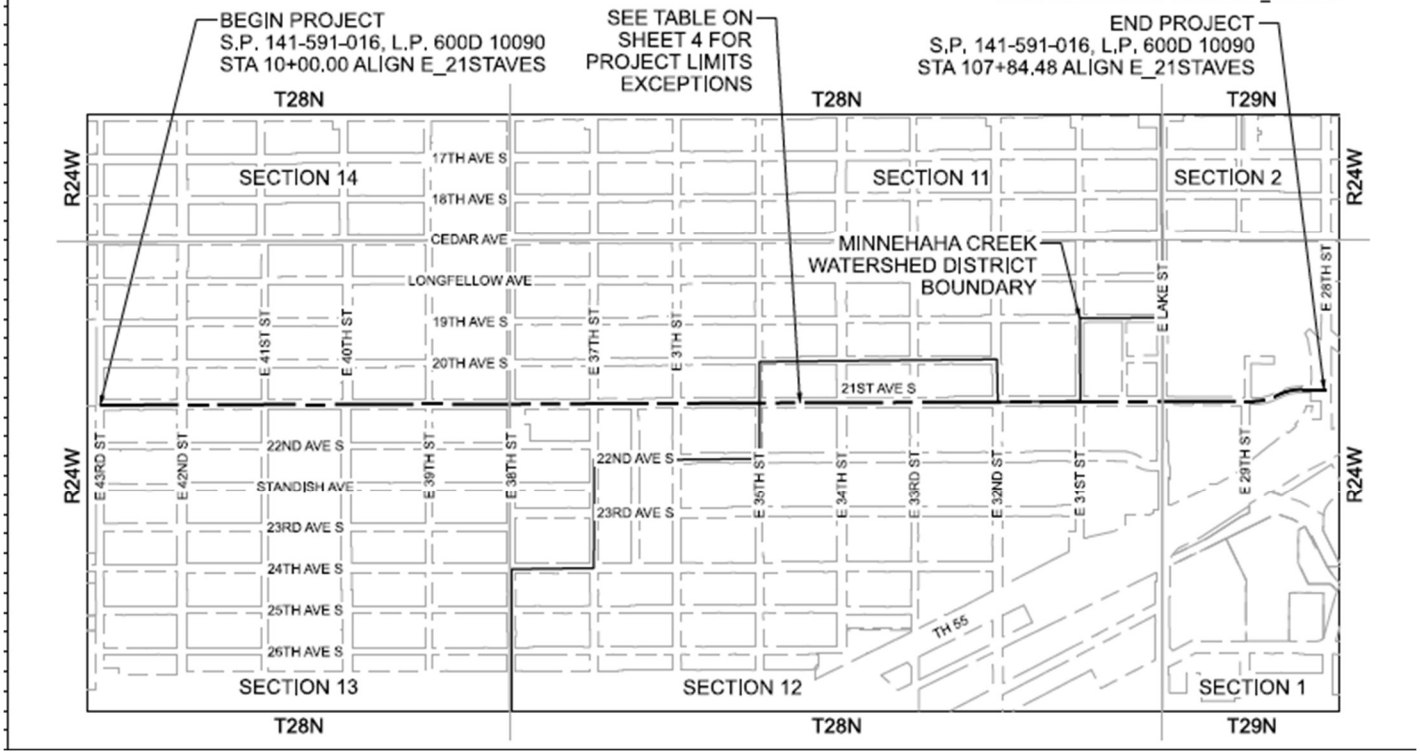

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

Unit Pricing

ITEM NO.	MNDOT SPEC NO.	ITEM	NOTE	APPROX. QUANT.	UNIT
1	2021.501	MOBILIZATION		1	LUMP SUM
2	2101.502	CLEARING		2	EACH
3	2101.502	GRUBBING		2	EACH
4	2102.518	PAVEMENT MARKING REMOVAL		5514	SQ FT
5	2104.502	REMOVE CATCH BASIN		8	EACH
6	2104.502	REMOVE DELINEATOR/MARKER		145	EACH
7	2104.502	REMOVE SIGN		61	EACH
8	2104.502	REMOVE SIGN PANEL		3	EACH
9	2104.502	REMOVE SIGN PANEL SPECIAL		58	EACH
10	2104.502	SALVAGE SIGN		7	EACH
11	2104.503	SAWING CONCRETE PAVEMENT (FULL DEPTH)		644	LIN FT
12	2104.503	SAWING BITUMINOUS PAVEMENT (FULL DEPTH)		3036	LIN FT
13	2104.503	REMOVE SEWER PIPE (STORM)		148	LIN FT
14	2104.503	REMOVE CURB AND GUTTER		2184	LIN FT
15	2104.504	REMOVE CONCRETE WALK		1875	SQ YD
16	2104.504	REMOVE CONCRETE DRIVEWAY PAVEMENT		18	SQ YD
17	2104.504	REMOVE BITUMINOUS PAVEMENT		1905	SQ YD
18	2106.507	EXCAVATION - COMMON	(P)	1219	CU YD
19	2106.507	COMMON EMBANKMENT (CV)	(P)	261	CU YD
20	2130.523	WATER		73	M GALLON
21	2211.507	AGGREGATE BASE (CV) CLASS 5		615	CU YD
22	2232.504	MILL BITUMINOUS SURFACE		323	SQ YD
23	2301.503	INTEGRANT CURB DESIGN B		174	LIN FT
24	2301.504	CONCRETE PAVEMENT 8.0"		284	SQ YD
25	2331.603	SAWED AND SEALED JOINT		271	LIN FT
26	2360.504	TYPE SP 12.5 WEARING COURSE MIXTURE (4,L)		1084	SQ YD
27	2411.603	CONCRETE STEPS-DESIGN SPECIAL		4	LIN FT

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

28	2503.503	12" PVC PIPE SEWER	268	LIN FT
29	2503.602	CONNECT TO EXISTING STORM SEWER	1	EACH
30	2503.602	CONNECT INTO EXISITNG DRAINAGE STRUCTURE	5	EACH
31	2503.603	PLUG FILL AND ABANDON PIPE SEWER	50	LIN FT
32	2504.602	ADJUST VALVE BOX	1	EACH
33	2506.502	CONSTRUCT DRAINAGE STRUCTURE DESIGN N	9	EACH
34	2506.502	CASTING ASSEMBLY	22	EACH
35	2506.502	ADJUST FRAME AND RING CASTING	22	EACH
36	2506.503	RECONSTRUCT DRAINAGE STRUCTURE	2	LIN FT
37	2521.518	4" CONCRETE WALK	7280	SQ FT
38	2521.518	6" CONCRETE WALK SPECIAL	8441	SQ FT
39	2521.602	DRILL AND GROUT REINF BAR (EPOXY COATED)	794	EACH
40	2521.618	CONCRETE CURB RAMP WALK	4806	SQ FT
41	2531.503	CONCRETE CURB AND GUTTER DESIGN B612	3	LIN FT
42	2531.503	CONCRETE CURB AND GUTTER DESIGN B624	1318	LIN FT
43	2531.503	CONCRETE CURB DESIGN SPECIAL	275	LIN FT
44	2531.504	CONCRETE MEDIAN	295	SQ YD
45	2531.504	8" CONCRETE DRIVEWAY PAVEMENT	150	SQ YD
46	2531.603	CONCRETE SILL	669	LIN FT
47	2531.603	CONCRETE CURB AND GUTTER	892	LIN FT
48	2531.603	CONCRETE CURB DESIGN V	552	LIN FT
49	2531.618	TRUNCATED DOMES	1149	SQ FT
50	2540.602	ADJUST MONUMENT COVER	2	EACH
51	2550.502	SIGN FOUNDATION	105	EACH
52	2563.601	TRAFFIC CONTROL SUPERVISOR	1	LUMP SUM
53	2563.601	TRAFFIC CONTROL	1	LUMP SUM
54	2564.502	INSTALL SIGN PANEL	3	EACH
55	2564.502	INSTALL SIGN	4	EACH
56	2564.502	DELINEATOR/MARKER	5	EACH
57	2564.502	DELINEATOR/MARKER PANEL	33	EACH
58	2564.518	SIGN	749	SQ FT

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com

59	2564.602	SIGN COLLAR	31	EACH
60	2564.602	DELINEATOR TYPE SPECIAL	15	EACH
61	2564.618	SIGN SPECIAL	123	SQ FT
62	2565.616	PEDESTRIAN CROSSWALK FLASHER SYSTEM	1	SYSTEM
63	2565.616	REVISE SIGNAL SYSTEM	1	SYSTEM
64	2571.602	TREE PROTECTION	60	EACH
65	2573.501	EROSION CONTROL SUPERVISOR	1	LUMP SUM
66	2573.502	STORM DRAIN INLET PROTECTION	119	EACH
67	2573.503	SILT FENCE, TYPE HI	821	LIN FT
68	2573.503	SEDIMENT CONTROL LOG TYPE COMPOST	40	LIN FT
69	2575.523	RAPID STABILIZATION METHOD 3	2.5	M GALLON
70	2582.503	12" SOLID LINE MULTI-COMPONENT	113	LIN FT
71	2582.503	4" BROKEN LINE MULTI-COMPONENT	210	LIN FT
72	2582.503	4" DOUBLE SOLID LINE MULTI-COMPONENT	1185	LIN FT
73	2582.503	4" SOLID LINE PREFORM TAPE GROUND IN	379	LIN FT
74	2582.503	6" SOLID LINE PREFORM THERMO GROUND IN	508	LIN FT
75	2582.503	24" SOLID LINE PREFORM THERMO GROUND IN	36	LIN FT
76	2582.503	4" BROKEN LINE PREFORM TAPE GROUND IN	60	LIN FT
77	2582.518	PAVEMENT MESSAGE PREFORM THERMOPLASTIC GROUND IN	2133	SQ FT
78	2582.518	CROSSWALK PREFORM THERMOPLASTIC GROUND IN	635	SQ FT

If you need assistance in obtaining bonding, lines of credit, insurance or would like assistance obtaining necessary equipment, supplies, materials, or any other related assistance, please contact 763.391-5959 or *estimating@meyerci.com*

Meyer Contracting is an Equal Opportunity/Affirmative Action Employer. Minorities, women, disabled, and veterans are encouraged to apply for available openings.

11000 93rd Ave N • Maple Grove, MN 55369
Phone: 763.391.5959 • Fax: 763.391.5960
www.meyerci.com